



FINAL CHARGE[®] GLOBAL COOLANT / ANTIFREEZE

DESCRIPTION:

FINAL CHARGE[®] Global Extended Life Coolant/Antifreeze is an Organic Acid Technology (OAT), globally formulated, ethylene glycol based coolant, which uses organic acid inhibitors (non 2-EH) to provide guaranteed protection for all cooling system metals. With proper maintenance,[†] Final Charge Global Extended Life Coolant/Antifreeze delivers guaranteed cooling system protection for ONE MILLION MILES of on-road use (8 years or 20,000 hours of off-road use) without the use of Supplemental Coolant Additives (SCAs). Final Charge Global Extended Life Coolant/Antifreeze is nitrite-free, phosphate-free, silicate-free and borate-free.

BENEFITS:

- Works in ALL heavy duty diesel, gasoline and natural gas engine cooling systems
- Guaranteed protection for ONE MILLION MILES of on-road use (8 years or 20,000 hours of off-road use)[†]
- Eliminates the need for SCAs and chemically charged filters
- Excellent heat transfer for high temperature applications such as engines with EGR and SCR systems
- Outstanding protection against corrosion and cavitation
- Non-abrasive formula can improve water pump seal life
- Eliminates drop-out, gel and reduces scale
- Can be mixed with other coolants (to maintain corrosion protection contamination levels should be kept below 25%)
- Provides exceptional long term elastomer compatibility

PROPERTIES:

	ASTM Method	Typical Values for	
		Concentrate	50/50 Pre-Diluted
Specific Gravity 60/60 °F	D1122	1.135	1.080
Freezing Point, 50% Vol. ¹	D1177	-34 °F (-37 °C)	-34 °F (-37 °C)
Boiling Point, 50% Vol.	D1120	325 °F (163 °C)	205 °F (96 °C)
pH, 50 Vol. %	D1121	8.5	8.5
Reserve Alkalinity	D1123	10	4.5
Ash Content	D1119	2	1
Color	—	Red	Red

¹Unpressurized

[†] Proper maintenance requires a complete cooling system flush and fill - and subsequent topping off, as needed - with Final Charge Global Extended Life 50/50 Pre-diluted Coolant/Antifreeze or Final Charge Global Extended Life Coolant/Antifreeze and water. For guaranteed protection, no other products or product supplements may be used. For all warranty details please visit www.peakhd.com. Follow OEM recommendations for specified maintenance.



Meets or exceeds these requirements:

- | | |
|----------------------------|--------------------------------|
| + ASTM D6210 | + MTU MTL 5048 |
| + ASTM D3306 | + NAVISTAR MPAPS B-1 TYPE IIIA |
| + CAT EC-1 | + PACCAR |
| + CUMMINS CES 14603 | + VOLVO/MACK |
| + DEUTZ DQC CB-14 | + TMC RP 329 |
| + DETROIT DIESEL 93K217 | |
| + MAN 324 TYPE SNF | |
| + MERCEDES DBL 7700, 326.3 | |

Recommended for use where the following equipment or specifications are cited:

- | | |
|------------------|------------------|
| + AGCO | + John Deere H24 |
| + CNH EG-3, EG-4 | + KOMATSU |
| + FENDT | + KUBOTA |
| + INTERNATIONAL | + WAUKESHA |

FREEZE/BOIL PROTECTION CHART	% of Cooling System Capacity	PROTECTS FROM	
		Freezing Down to	Boiling Up to*
	40	-13 °F	260 °F
	50	-34 °F	265 °F
60	-62 °F	270 °F	

*Using a 15 PSI Pressure Cap

*At sea level atmospheric pressure with 15lb. pressure cap. The boiling point decreases about 2 °F per 1,000 feet of altitude and increases about 2.5 °F per pound developed in the system.

PEAK

COMMERCIAL & INDUSTRIAL



FXAOB1
55 Gallon Concentrate Drum
 UPC: 074804-02067-0



FXAB51
55 Gallon 50/50 Drum
 UPC: 074804-02068-7



FXAOB3
1 Gallon Concentrate Bottle
 Gallon UPC: 074804-00836-4
 Case UPC: 074804-10836-1
 Case SCC 14: 1-0074804-00836-1



FXAB53
1 Gallon 50/50 Bottle
 Gallon UPC: 074804-00358-1
 Case UPC: 074804-10358-8
 Case SCC 14: 1-0074804-00358-8

FXAOB0
Bulk Concentrate

FXAB50
Bulk 50/50

Part #	UNIT	Pack/Size	Case/Drum Dimensions	Unit Wt(lbs)	Units per Pallet	Pallets per Truck	Pallet Weight*
FXAOB1	Drum	55 gal	23.5" dia. x 34.5" h	559.00	4	20	2,286
FXAB51	Drum	55 gal	23.5" dia. x 34.5" h	543.00	4	20	2,222
FXAOB3	Case	6/1 gal	16" l x 12.5" w x 12.5" h	60.50	36	20	2,228
FXAB53	Case	6/1 gal	16" l x 12.5" w x 12.5" h	57.00	36	20	2,102


(*) Includes Pallet weight of 50 lbs. each

To order, please call Old World Industries, LLC Customer Service at 1-800-323-8755.

PEAK Commercial & Industrial products have been trusted by fleets, large and small, for over 65 years, to keep their equipment running.



Clint Bowyer

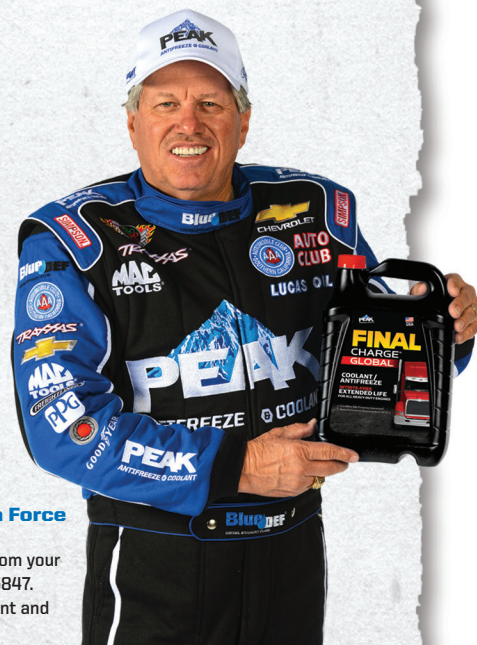

John Force



[peakhd.com](https://www.peakhd.com)

HANDLING AND SAFETY INFORMATION Refer to Old World Industries Material Safety Data Sheet (MSDS). The MSDS is available from your PEAK Performance Supplier at www.peakauto.com, or by calling Old World Industries' PEAK technical support line at 1-800-477-5847. We Only Have One World...Please Help Protect It. All laws and regulations should be observed when disposing of Antifreeze/Coolant and Radiator Fluids. Call the EPA or the office of your state or local environmental agency for details on disposal procedures.

RUN TRUE™

Old World Industries, LLC

We Support
Be Car Care Aware™
www.beccare.org

Distributed by Old World Industries, LLC Northbrook, IL 60062
 p 800.323.5440 www.peakauto.com

©2020 PEAK and the PEAK Mountain Graphic are Registered Trademarks of Old World Industries,

FILE LOCATION: Mac4/Mac2/PEAK Commercial & Industrial/Spec Sheets/
PROJECT NAME: 202005_ARF59372_FINAL CHARGE AFC GLOBAL SPEC SHEET
FILE NAME: 202005_ARF59372_FINAL CHARGE AFC GLOBAL SPEC SHEET.ai

Project Initiator:
Alex

DESIGNER NAME: **Date:** **ROUND #:** **# ROUNDS SENT TO PRINTER**

Amy 05/18/20 1 N/A

FILE SPELL CHECKED **CMYK COLORS** **SPOT COLORS** **GCM1 COLORS** **Total Number Of Colors**

05/18/20 0 0 4

ARTWORK CREATED IN HOUSE
 ARTWORK SUPPLIED BY CUSTOMER **PRODUCTION** **CONCEPT**
 ARTWORK CREATED BY AGENCY

*Questions regarding this artwork, contact:
Jill Seminary or Kevin McNeiley in Graphics @ 847-559-2277**



**OWI GRAPHICS
DEPARTMENT**